


# **Label Printer**

## **Driver Setup Manual**


# 1. Windows Driver Installation




Before installing the printer driver, please connect your printer to the computer and **make sure the power switch is turned off.**


**Insert the Drive disc on the computer and find drvier file"JK-402A Drive (for Win7 Win8 Win10)"**

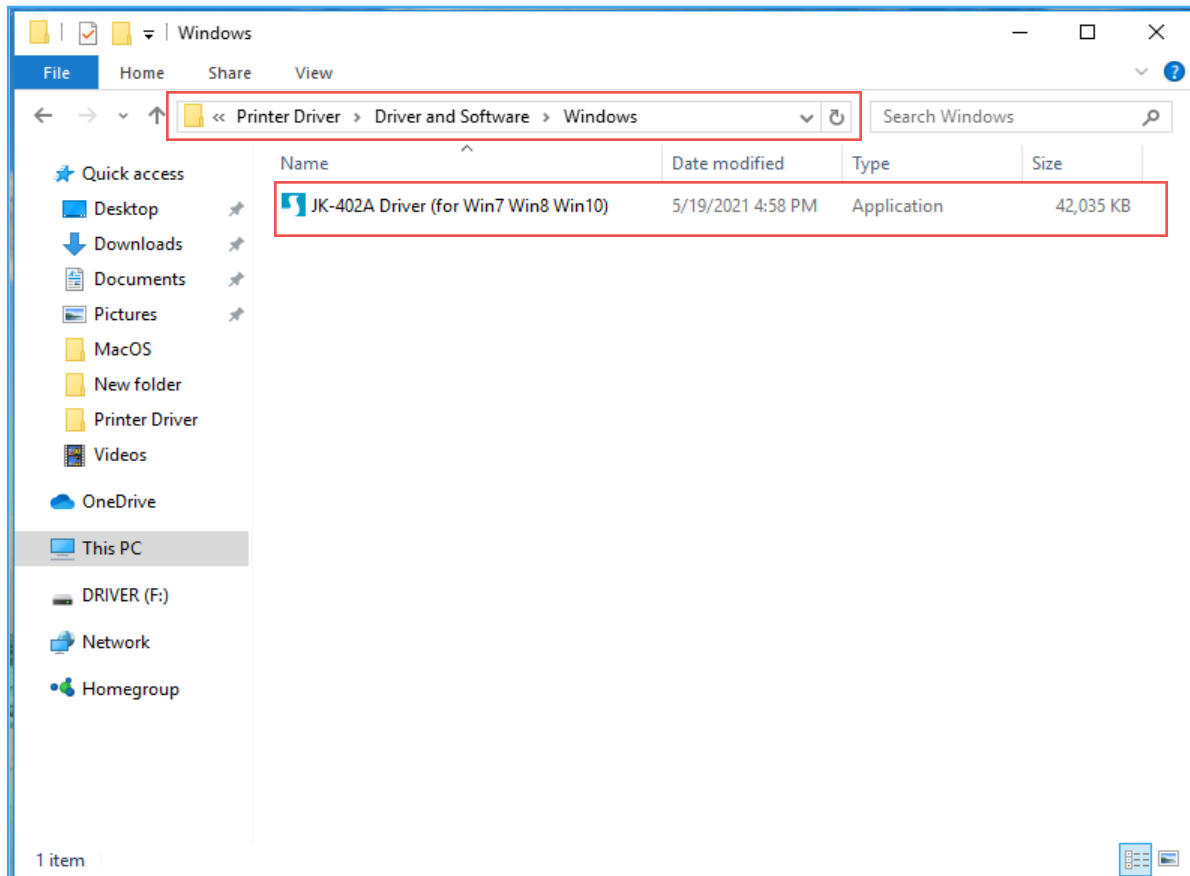



**Double click the drive file "JK-402A Drive(for Win7 Win8 Win10)" ,Then install as shown in the following figure.**

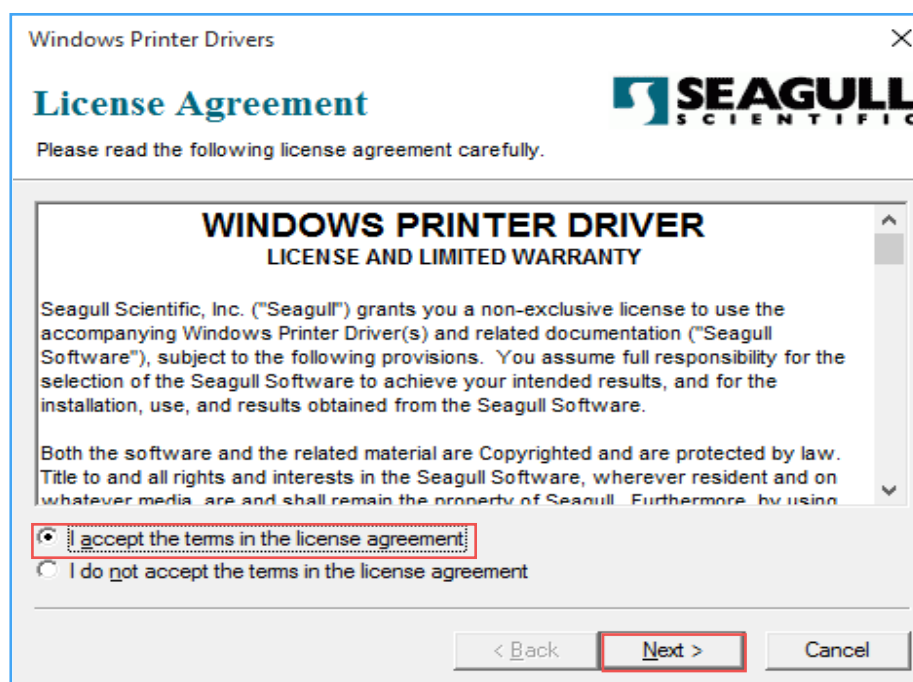

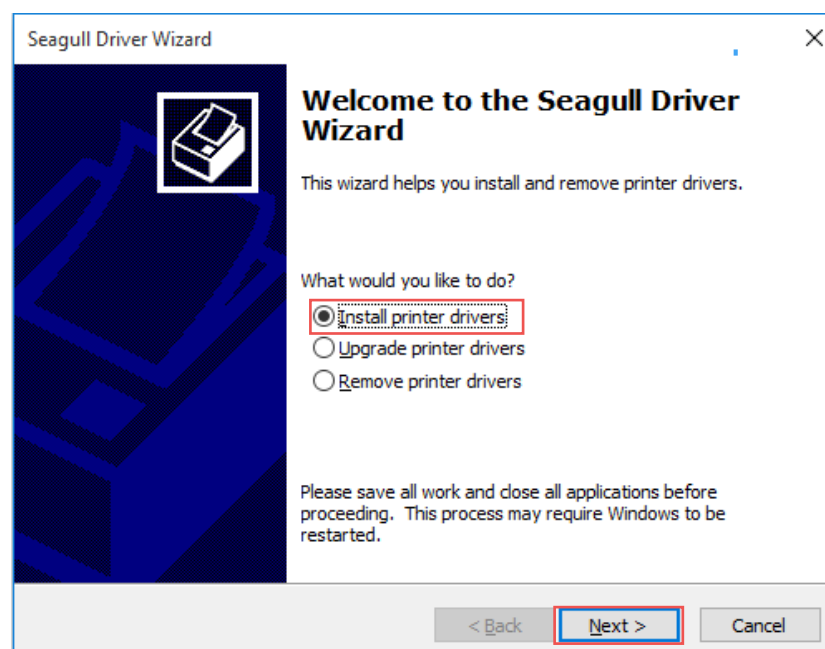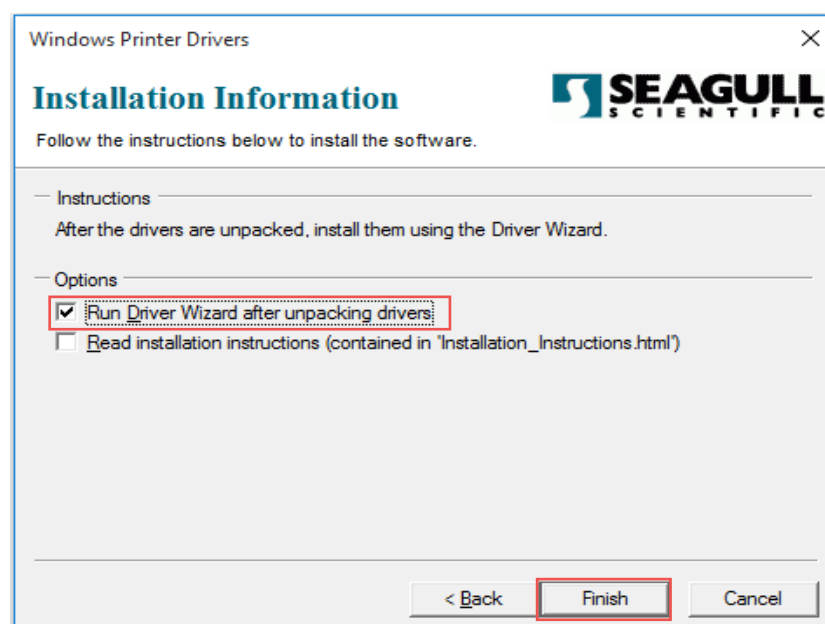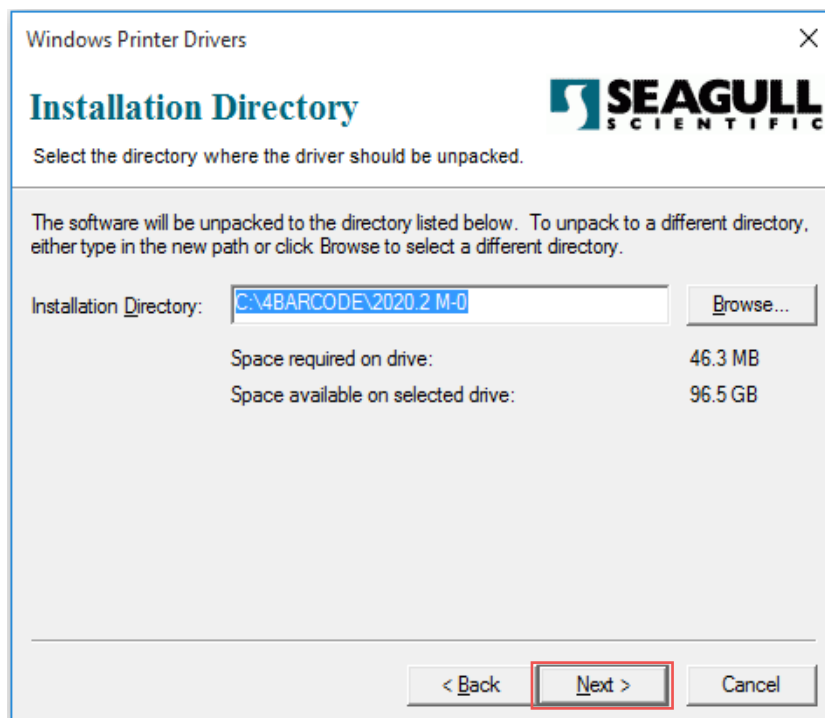

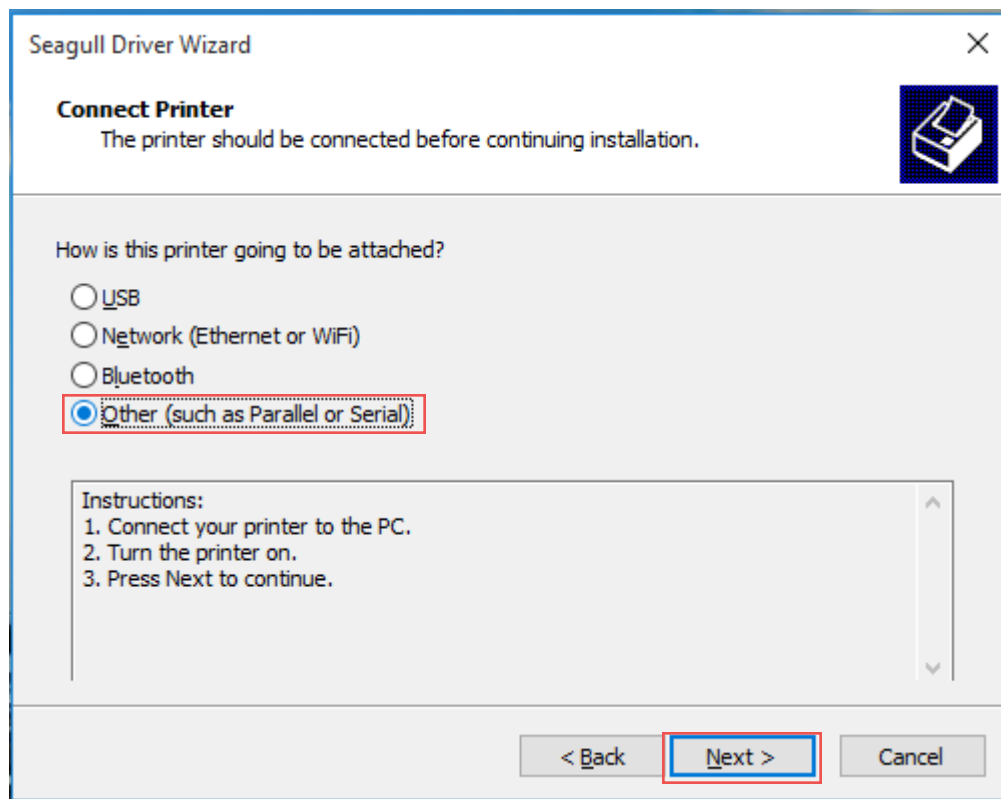

When you go to this step ,you need to turn on the printer power,and then proceed to the next step of installation.

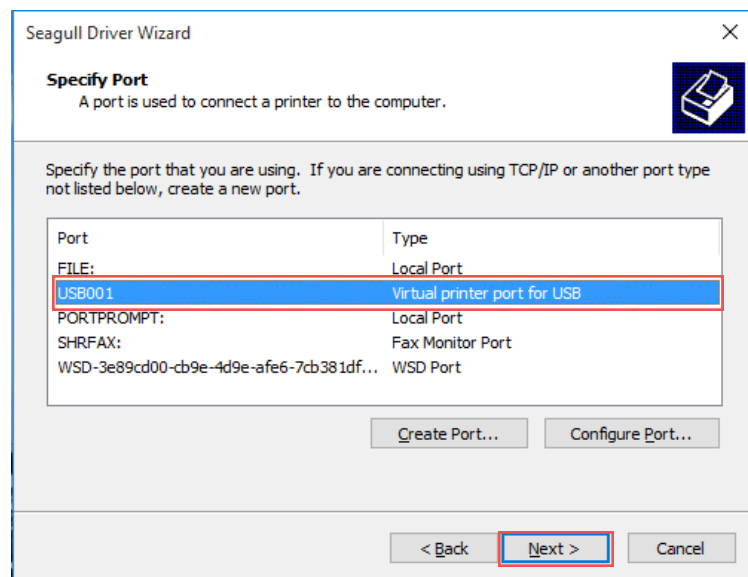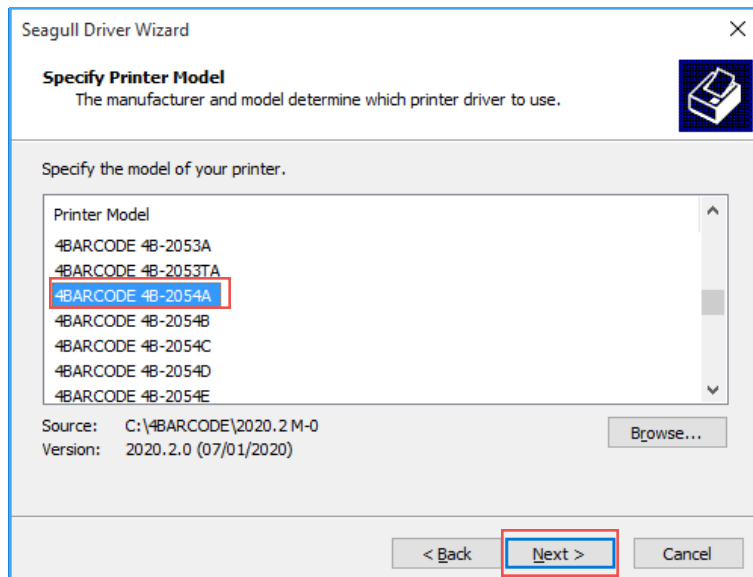

Seagull Driver Wizard

**Specify Printer Name**  
Names are used to identify the printer on this computer and on the network.

Enter a name for this printer.

Printer name:

☒ Use this printer as the default printer

Specify whether or not you want to share this printer with other network users. When sharing, you must provide a share name.

☒ Do not share this printer

☐ Share name:

< Back   Next >   Cancel

Seagull Driver Wizard

**Completing the Seagull Driver Wizard**

A new printer will be installed using the following settings:

Name:	4BARCODE 4B-2054A
Share name:	<Not Shared>
Port:	USB001
Default:	Yes
Manufacturer:	4BARCODE
Model:	4BARCODE 4B-2054A
Version:	2020.2.0 (07/01/2020)

Number of installed printers to be upgraded: 0

To begin the driver installation process, click Finish.


< Back   Finish   Cancel

Seagull Driver Wizard

**Installing Drivers**  
Please wait while your system is updated.

Installing printer '4BARCODE 4B-2054A'...


< Back   Finish   Cancel

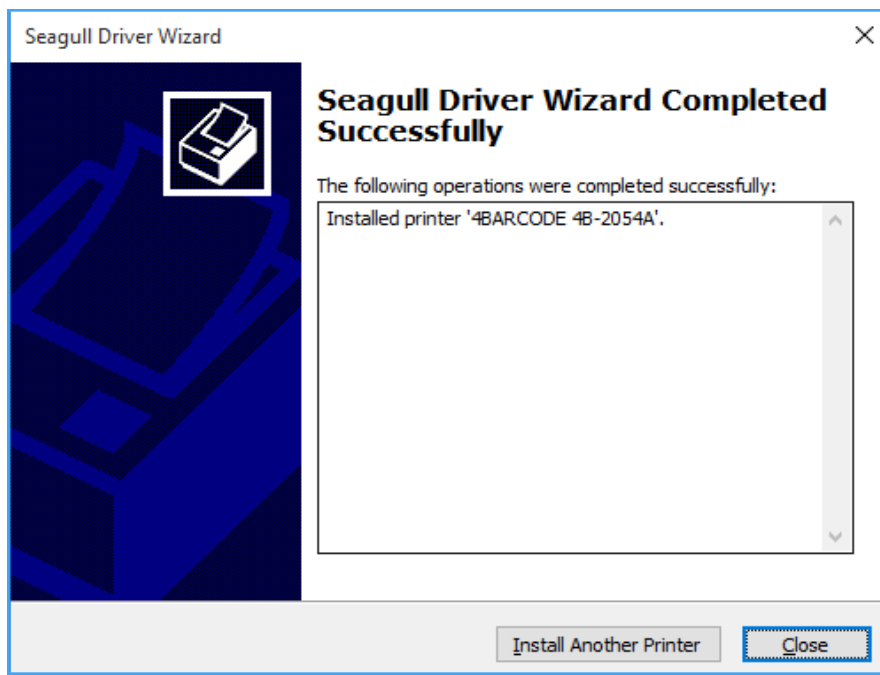


Click “Close” to finish driver installation.

## 2. Printer Setup and Testing


### 2.1 Setup Printer Properties

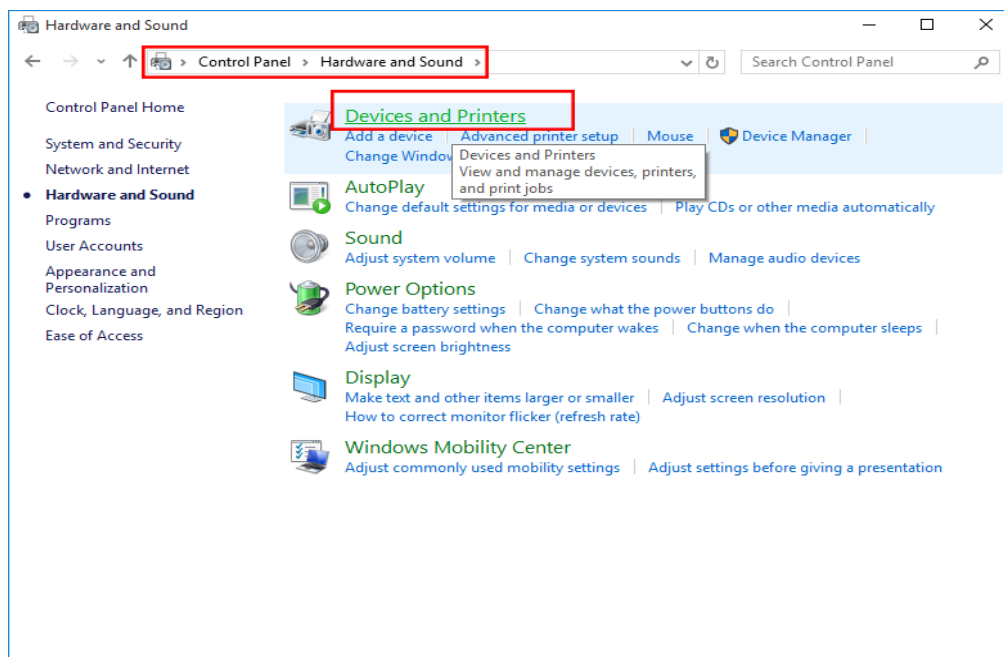

Follow the path shown in the above figure to find the "Devices and Printers", and then click "Devices and Printers", just as above picture

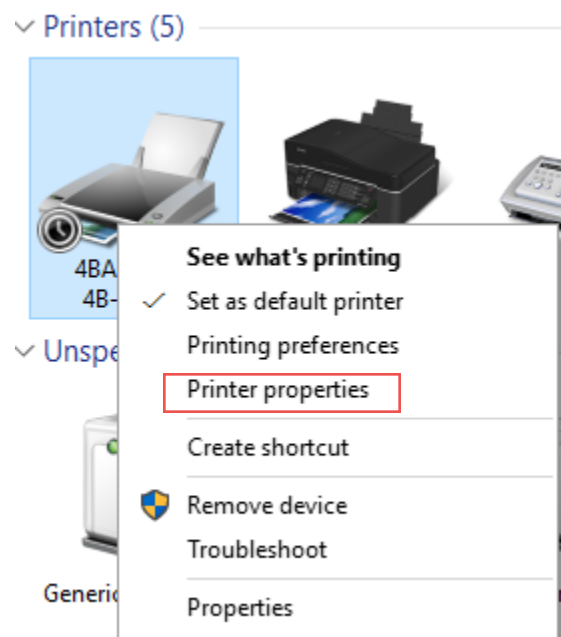

Right-Click "Label Printer" and then click "Printer properties" And then, it will show as below picture:

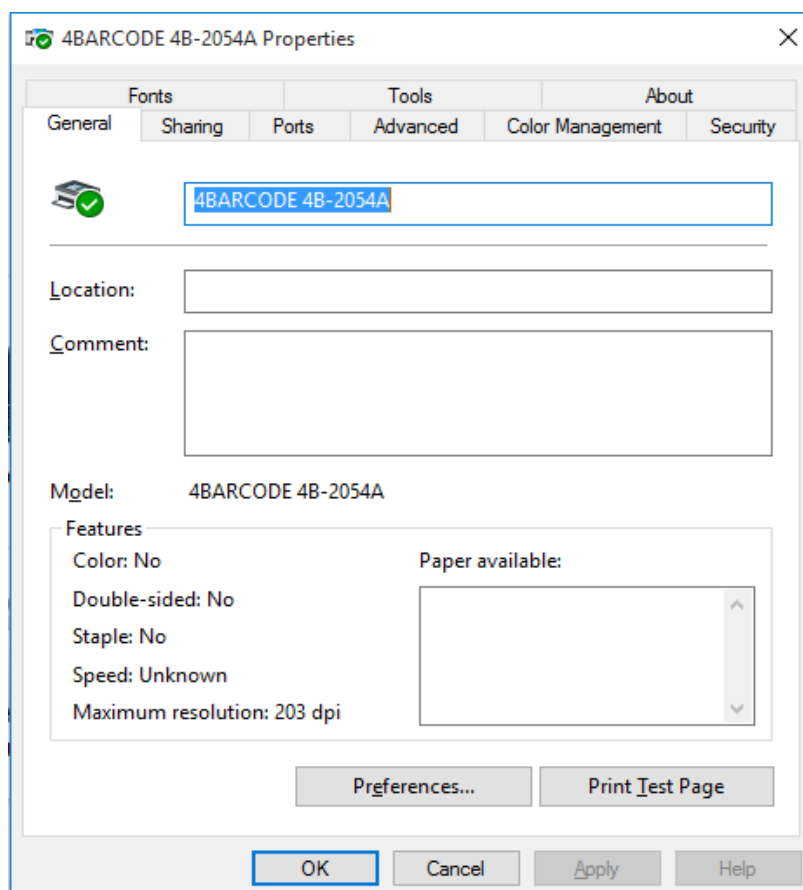


On Label Printer “General”, you could configure the printer communication port, such as Serial port, Parallel port and USB port. You also could set the paper specification, beeper etc.

After all the setting, you could start to print the testing page.

## 2.2 Printing Test Page

After finishing port configuration, we start to print test page. On Label Printer “General”:

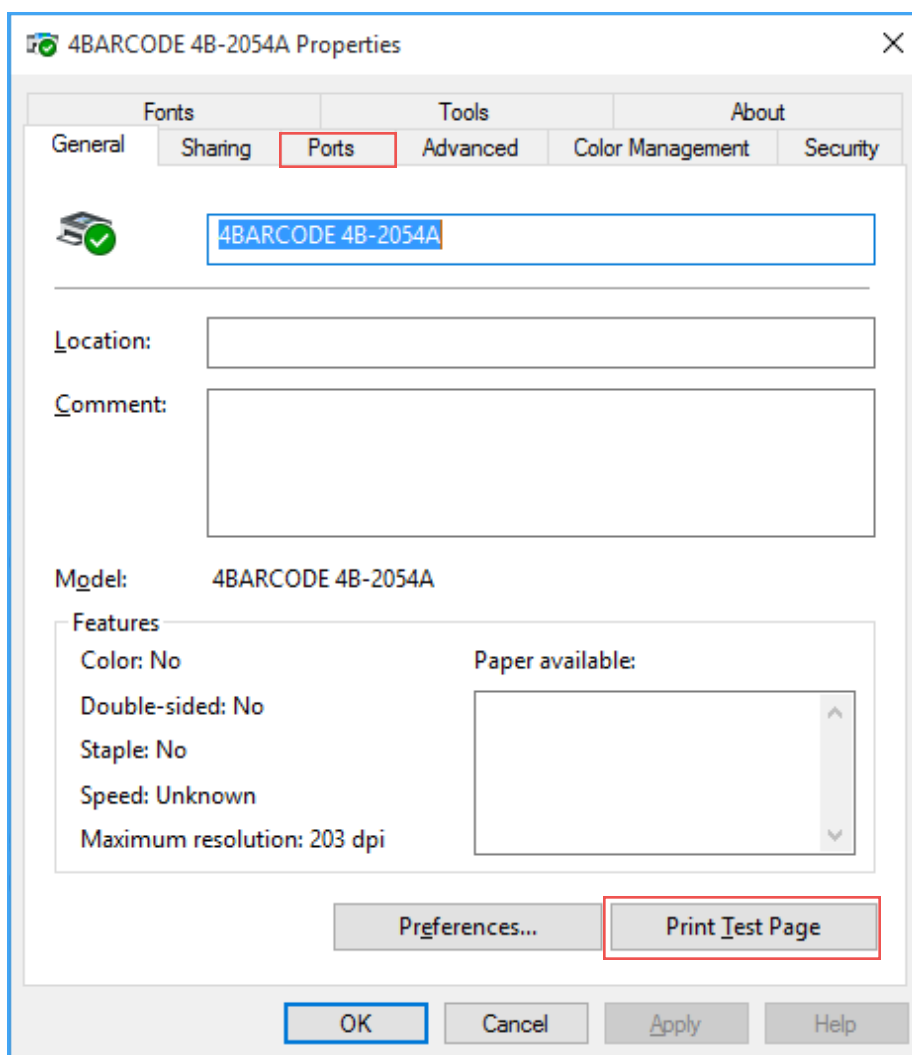

**The test page coming out indicates that the installation is complete  
If the test page is not printed, please check if the port is selected wrong.**




Click “Print Test Page”, the printer will print test page, which means the printer has been connected with computer successfully and the port configuration is correct.


## 2.3 Other Properties and Function Configuration

You could set the paper specification etc., please refer to the follows:


Select the printer properties, click on "Print preferred page", enter the page and print settings interface, as shown in the following figure.

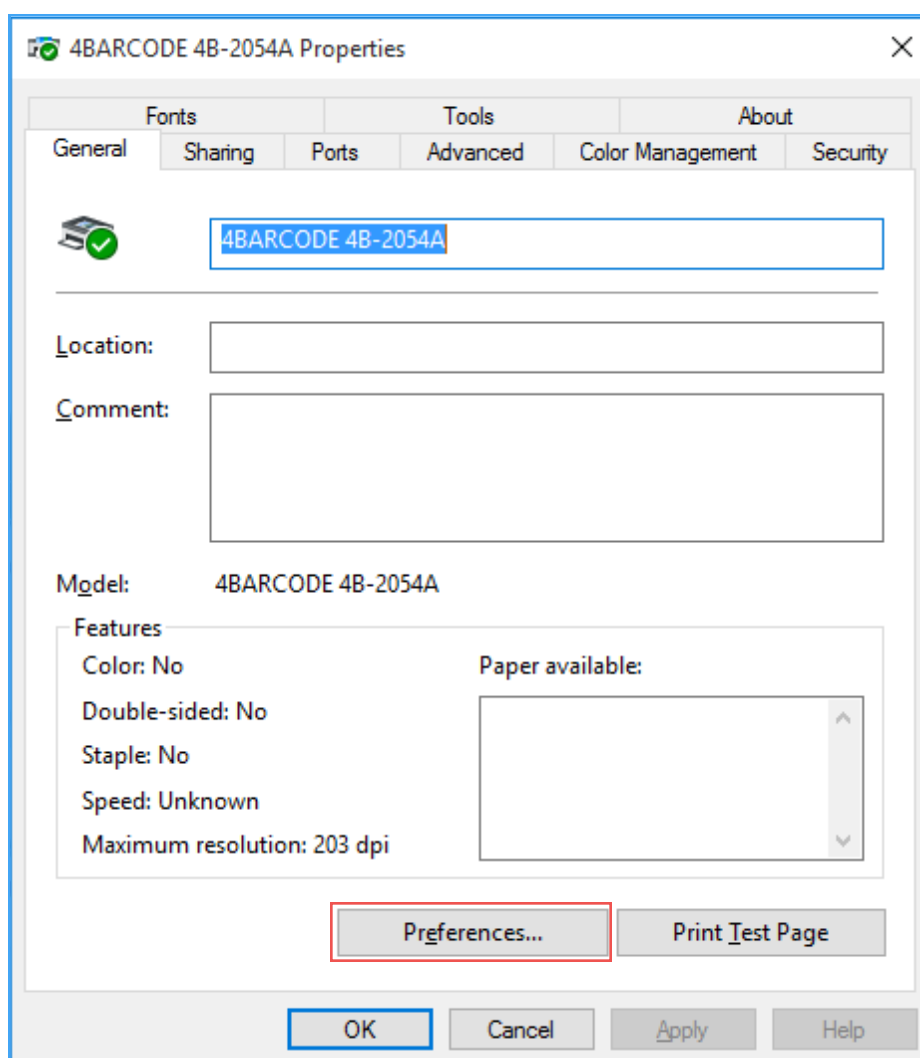


Click the Paper Name drop-down box to select the paper size to use.

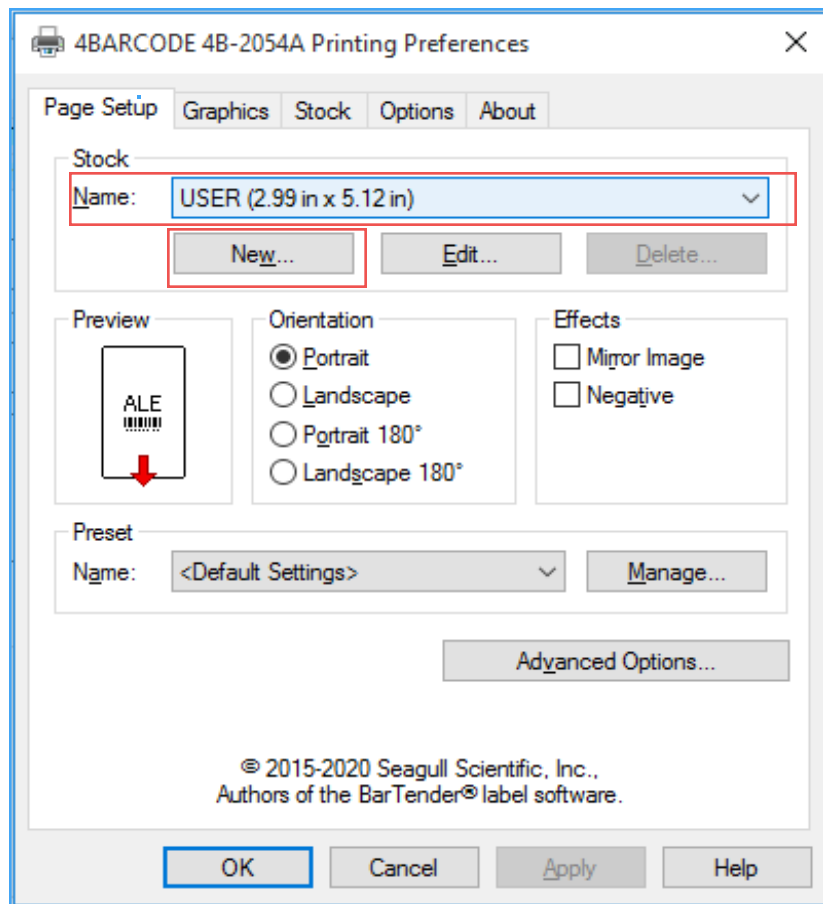


Click “New” to enter the custom paper interface.

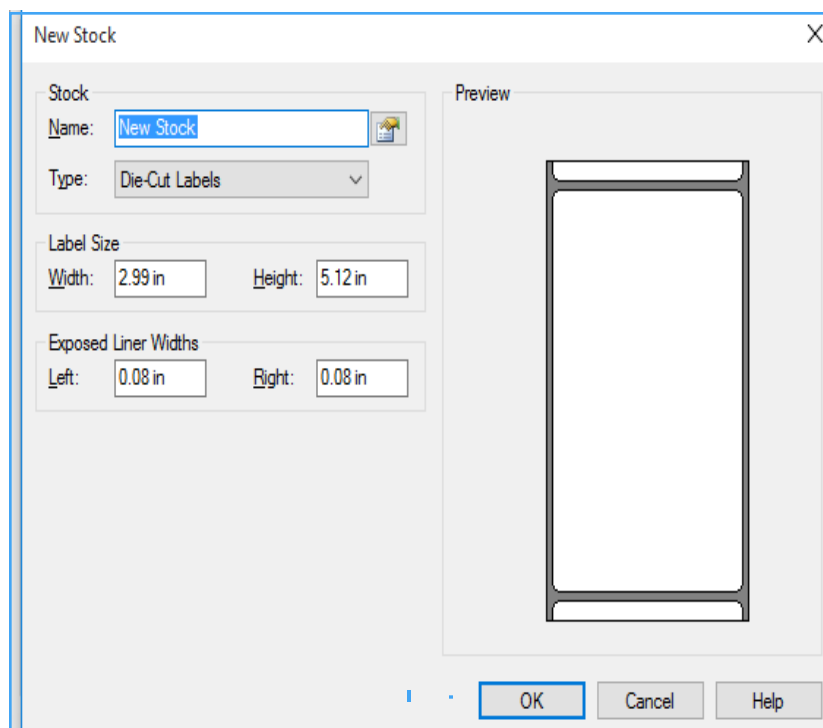


Click “Edit” to enter the label size edit.

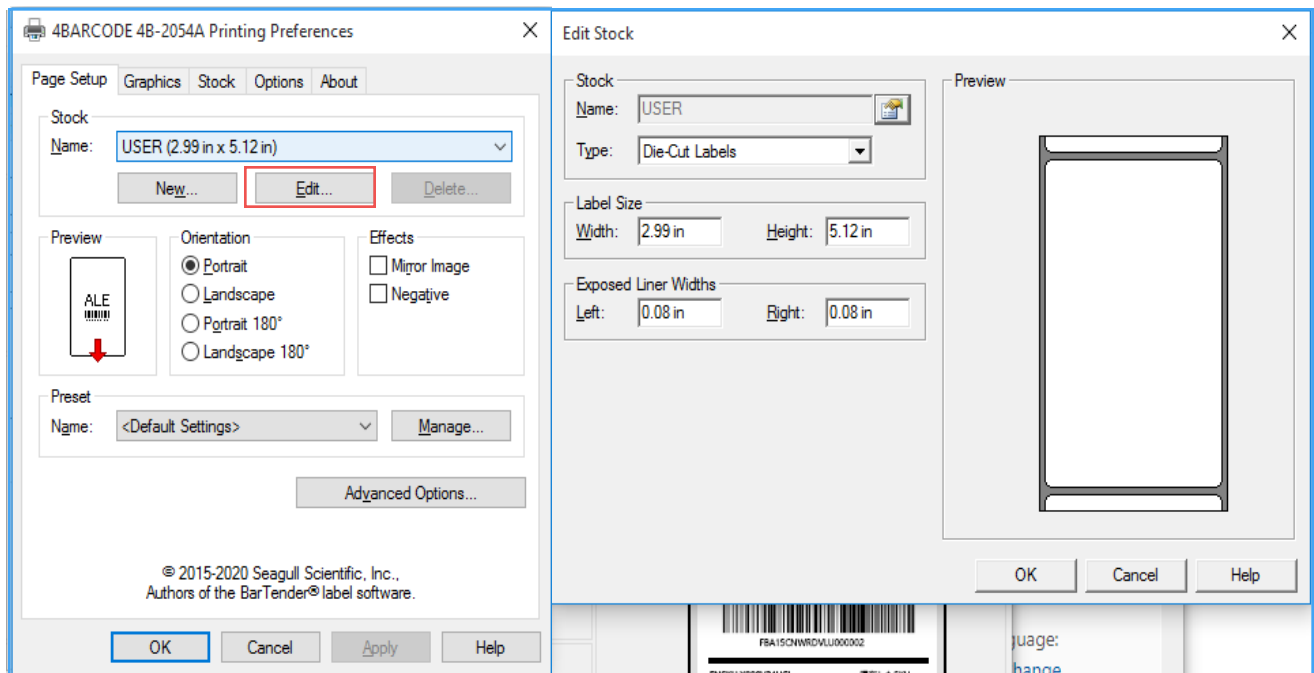


Rotate to print in different directions.

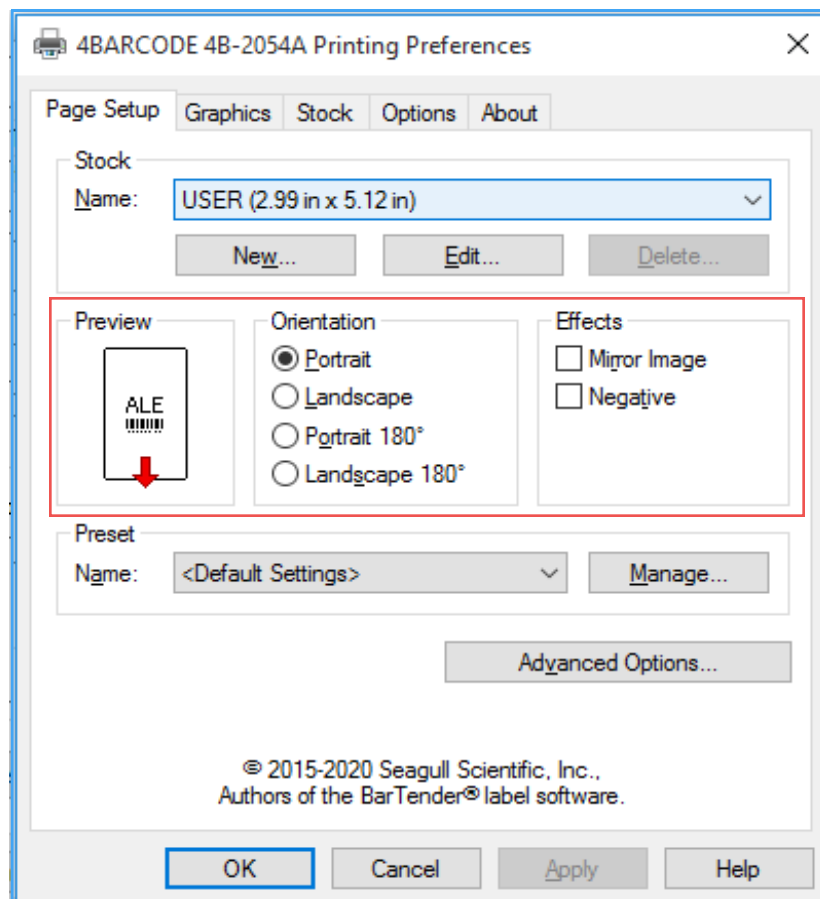


Click "Graphics" to enter the color mixing and color setting page.

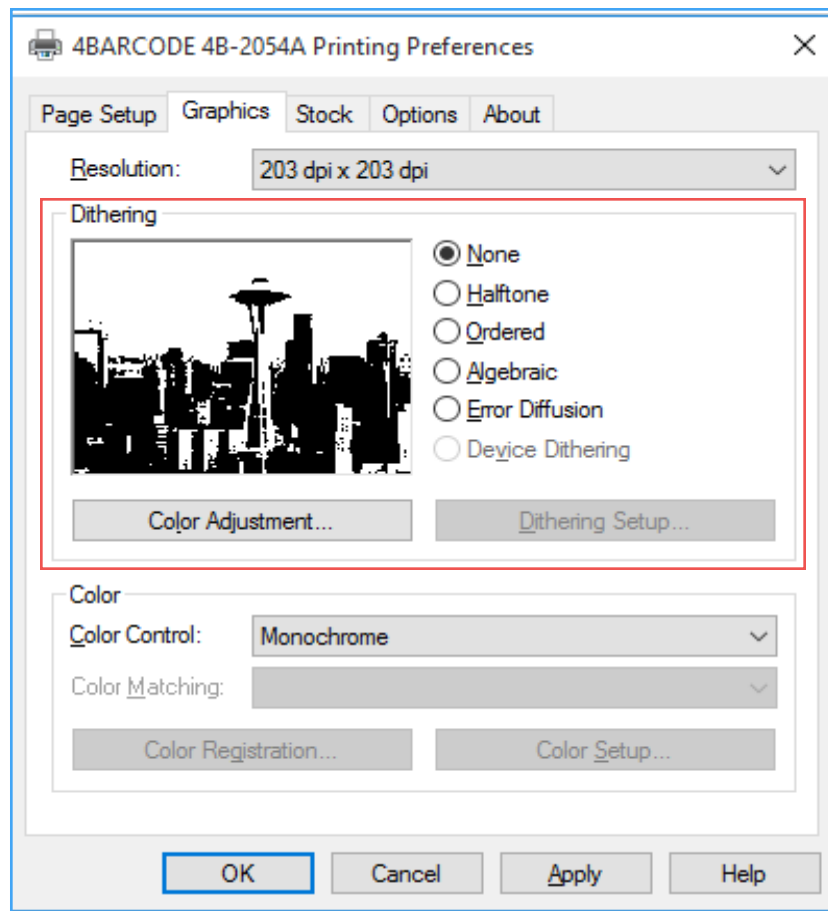

Click "stock" to enter the paper setup page.

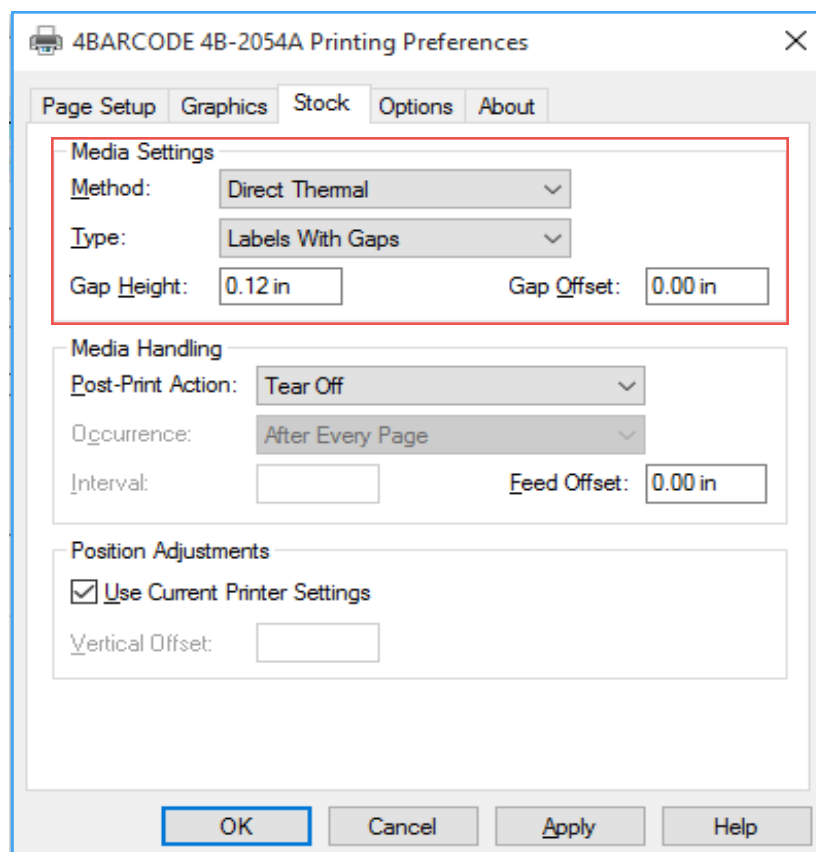





Click "Options" to enter the printer density and printer speed setting page.

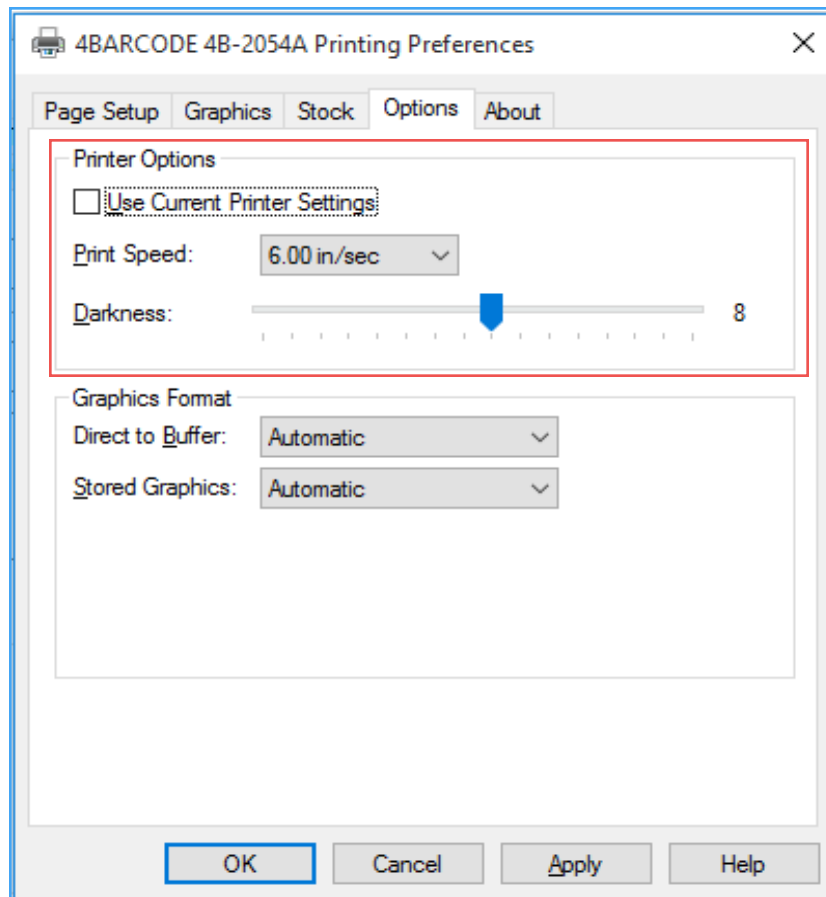


# MAC PRINTING SETUP FOR MAC OS

Please insert the included USB into your computer. A flash drive icon will usually appear on the desktop. If a dialog box does not appear, open Finder and select the flash drive on the left side of the window.


Insert the drive disc into the computer, and find the MAC printer driver file "JK-402A.pkg" as shown in the figure below.

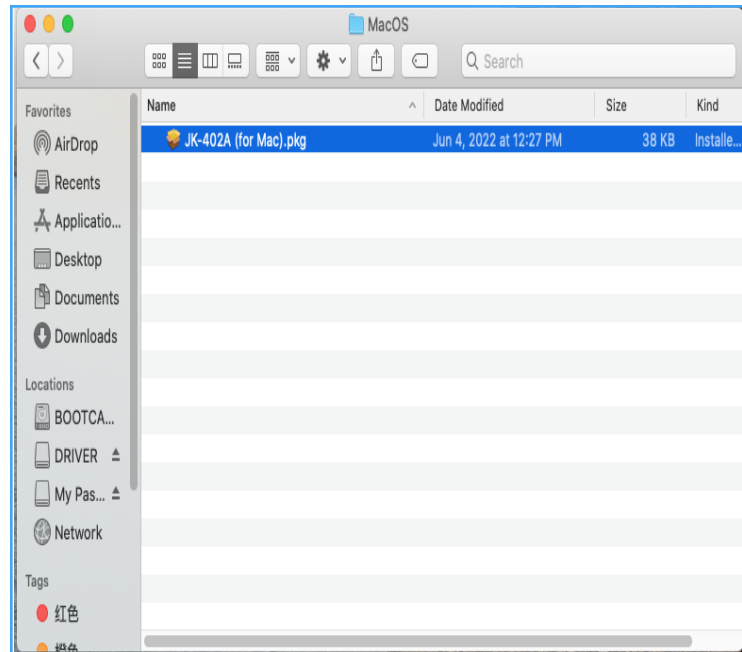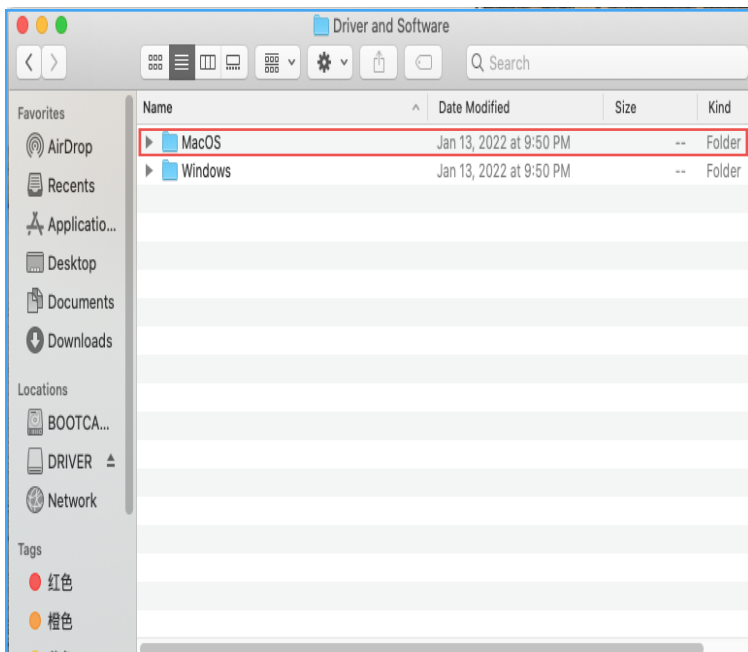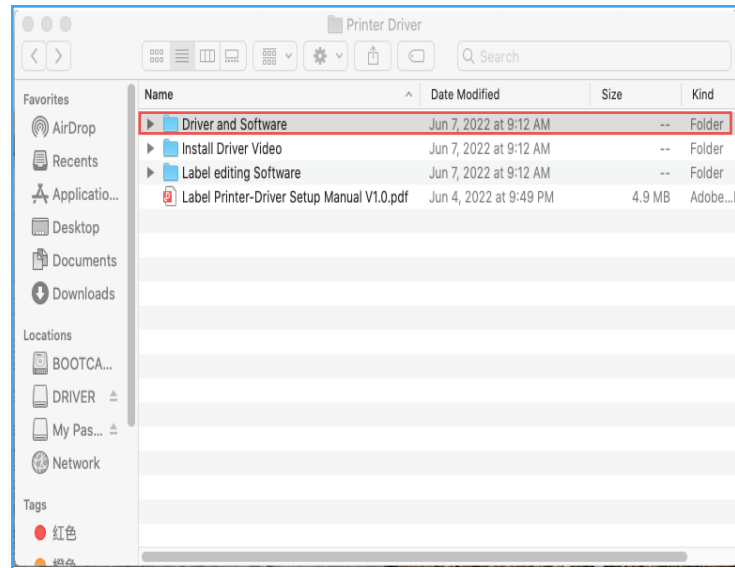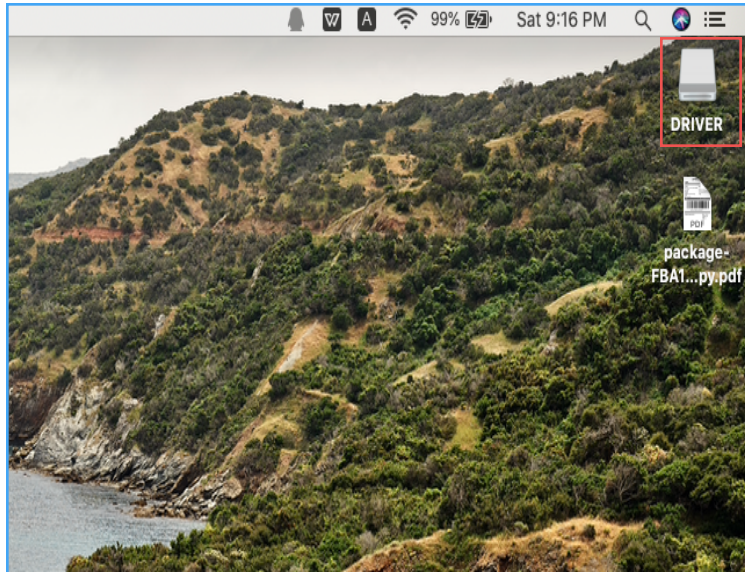


Double click "JK-402A.pkg" to begin to install driver.

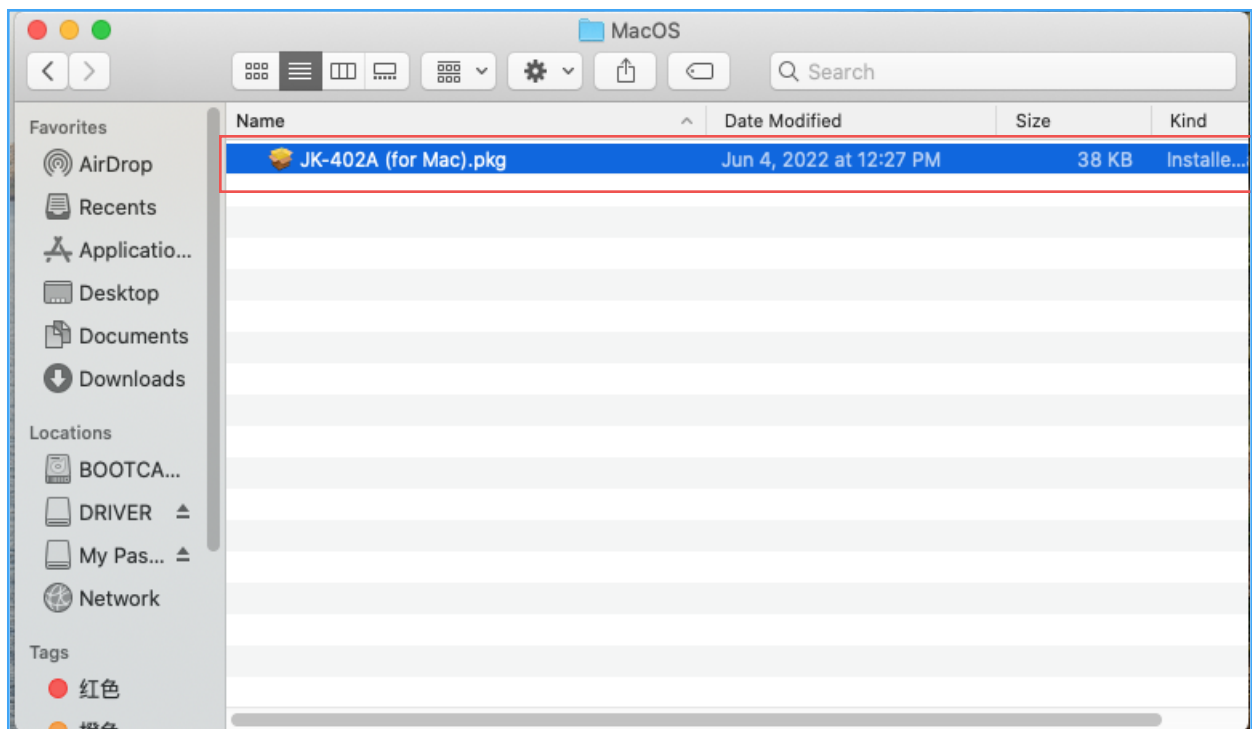


Follow the installation steps until you see "The installation was successful" window

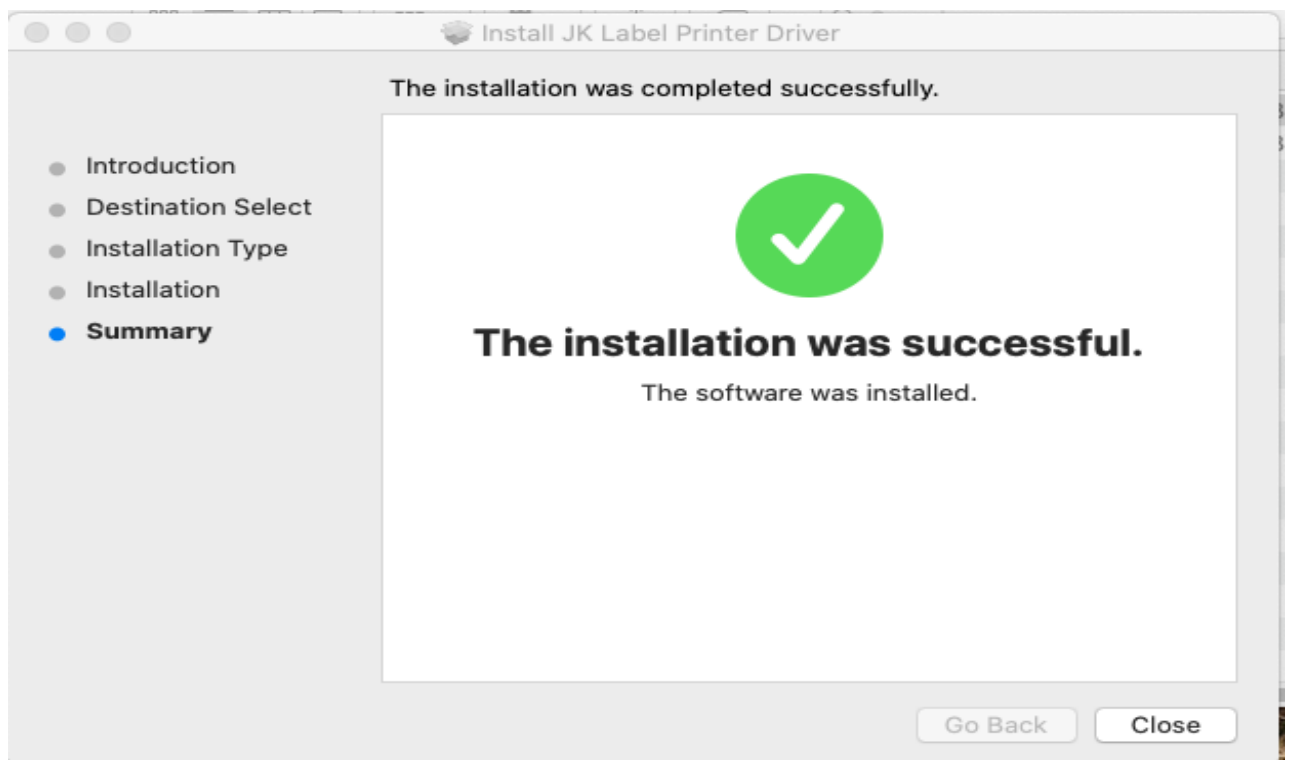

Open "System Preferences" and click on "Printers and Scanners".

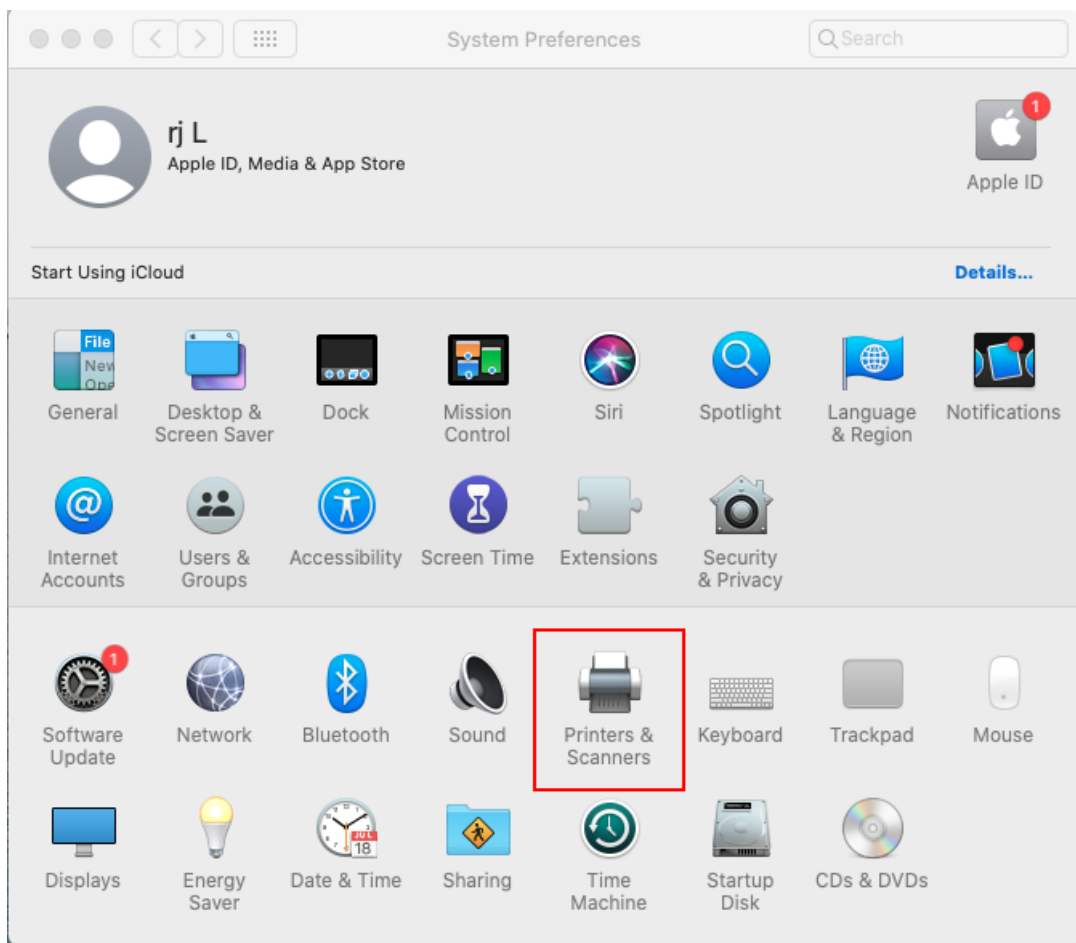


Click "+" to add a new printer.

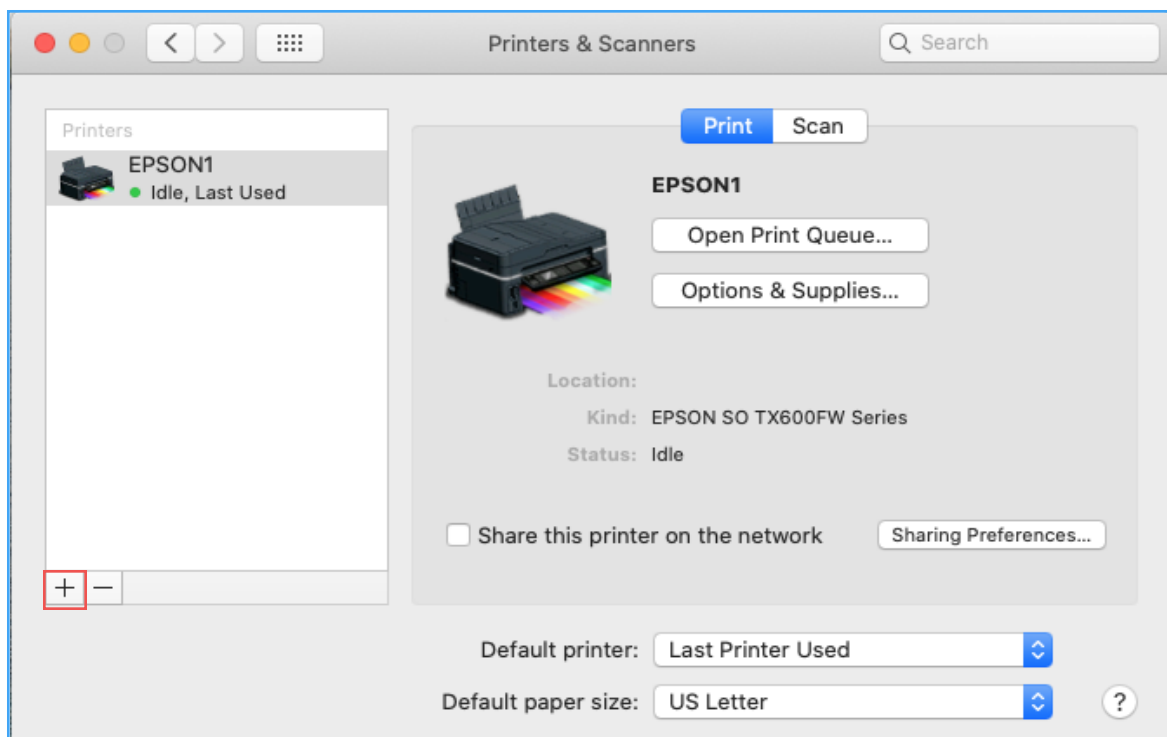




Click on "JK-402A" (or other model of KINCAN) , and choose "Select Software" in the drop down menu.

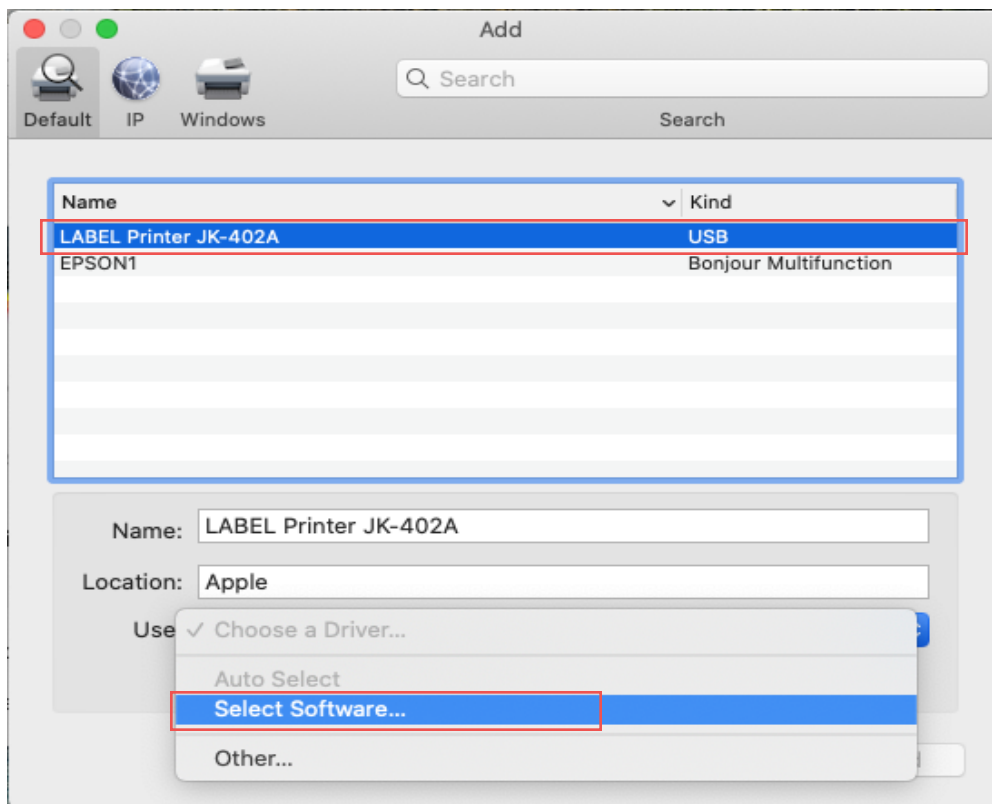


Input "4B-2054A" to search and choose, the click "OK".

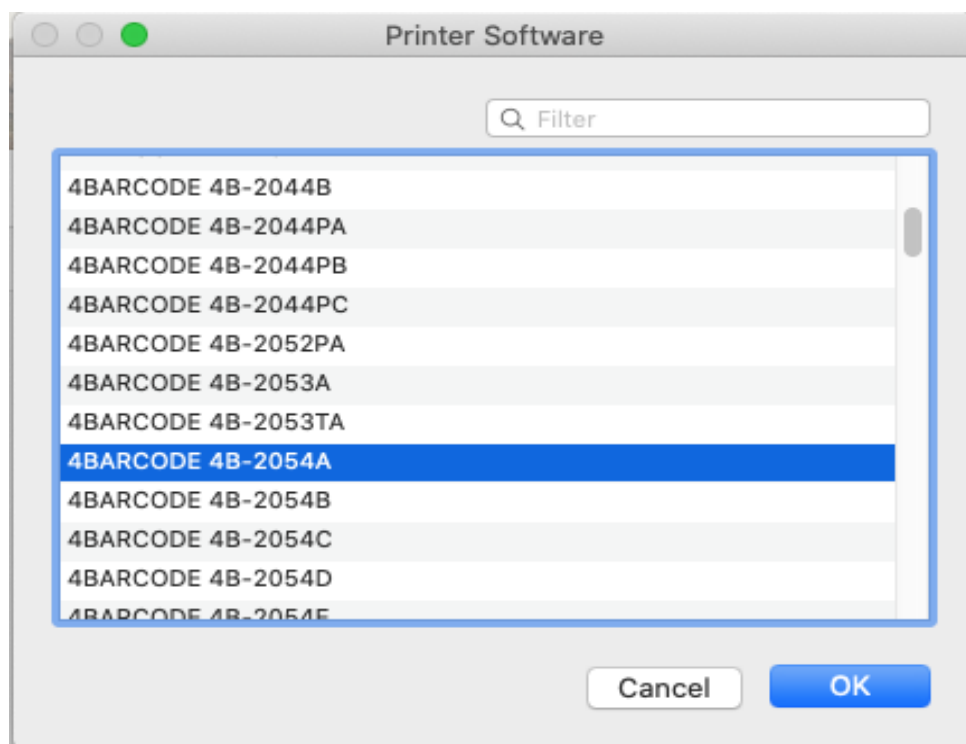


Click on "Add" to finish .(if you see a warning windows, click "repair" to continue).

# HERI'S HOW TO PRINT YOUR LABELS:

Open the PDF in Preview, As shown in the figure below.

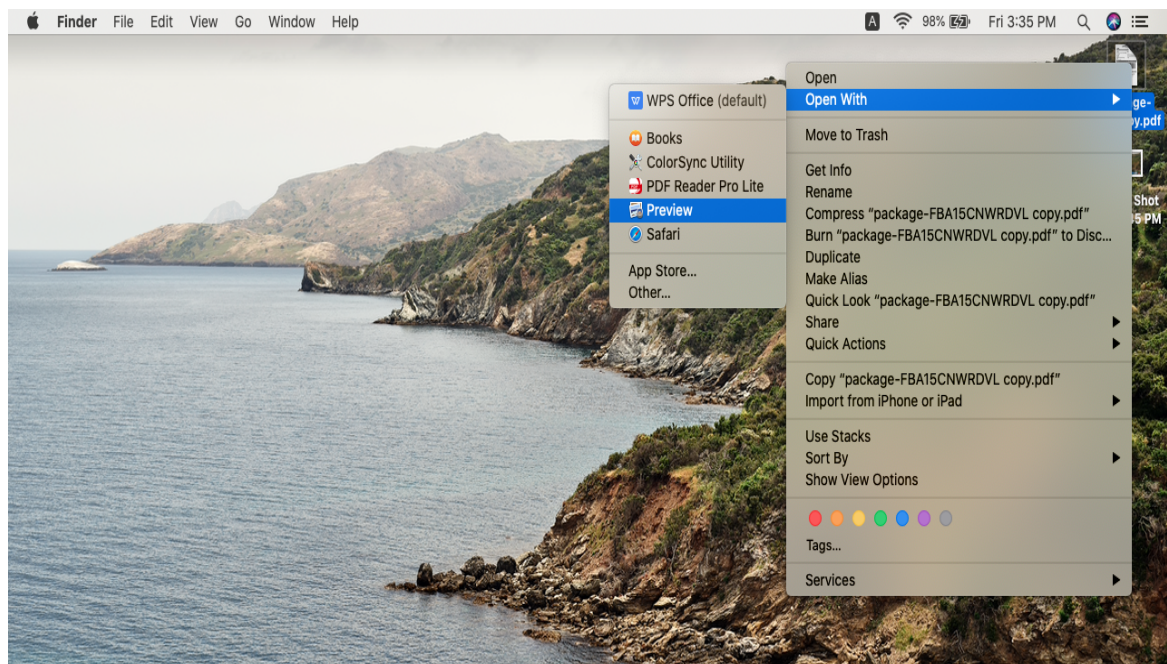

From the top panel, select File >Print

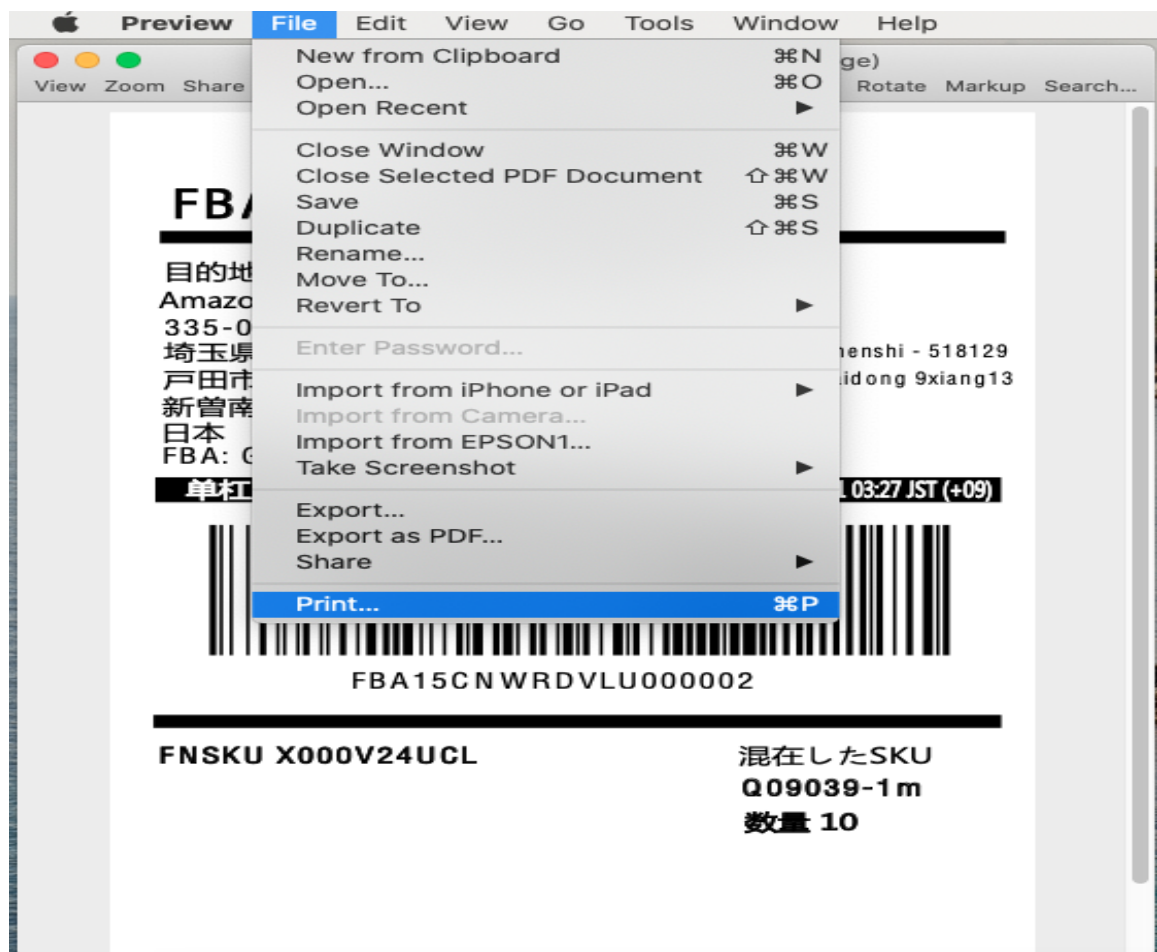

Click on the Paper Size drop-down box to select the paper size you currently need to use and customize the paper size settings.

Printer: LABEL Printer JK-402A

Presets: Default Settings

Copies: 1

Pages: All

Paper Size: **Untitled** 80 by 130 mm

Orientation: Portrait

Preview

☒ Auto Rotate ☐ Show Notes

☐ Scale: 78%

☒ Scale to Fit: ☒ Print Entire Image ☐ Fill Entire Paper

Copies per page: 1

PDF Hide Details Cancel Print

Paper Size: 100 mm Width 150 Height

Non-Printable Area: User Defined

0 mm Top

0 mm Bottom

0 mm Left 1 mm Right

+ - Duplicate

? Cancel OK



Select the printer features settings for print speed, print concentration, etc

The screenshot shows the printer settings interface for a LABEL Printer JK-402A. On the left is a preview of an FBA shipping label. The right side contains various settings. The 'Printer Features' section is highlighted with a red box and contains the following settings:

- Printer: LABEL Printer JK-402A
- Presets: Default Settings
- Copies: 1
- Pages: All
- Paper Size: Untitled (100 by 150 mm)
- Orientation: Portrait
- Printer Features: Printer Options
- Print Speed: 152.4 mm/sec
- Darkness: 8
- Vertical: 0
- Horizontal: 0

At the bottom, there are buttons for '?', 'PDF', 'Hide Details', 'Cancel', and 'Print'.

Select the printer paper settings for print method, label type, etc

The screenshot shows the same printer settings interface, but with the 'Media Setting' section highlighted by a red box. The settings in this section are:

- Printer: LABEL Printer JK-402A
- Presets: Default Settings
- Copies: 1
- Pages: All
- Paper Size: Untitled (100 by 150 mm)
- Orientation: Portrait
- Printer Features: Media Setting
- Method: Direct Thermal
- Type: Label with Gaps
- GapsHeight: 0.118 in
- Post-Print Action: Tear Off
- Occurrence: After Every Page

The bottom navigation bar remains the same with buttons for '?', 'PDF', 'Hide Details', 'Cancel', and 'Print'.

Settings are complete, click Print.

Happy Printing !